



NEW GENERATION TSHi AND QH SERIES INTELLIGENT ELECTRIC CHAIN HOIST

BADA's new generation TSHi and QH series Intelligent Electric Chain Hoists use an industrial processor controlled drive system, and consist of motor, driver, load sensor, limit switch, photoelectric switch etc., with in-line slide, float, pinpoint precision of three modes, the operators can efficiently and freely lift and handle materials. TSHi and QH has the characteristics of ergonomic industrial design, high precision, speed controllability, low headroom, intelligence, simple operation, high efficiency, safety and reliability.



APPLICATIONS:

Auto assembly (engines, transmissions, instrument boards, auto seats, glass, chassis components etc.)

Natural gas, oil and other energy industries (valve, drilling components etc.)

Aerospace, military and other industries heavy equipment manufacturing and processing

Tool & die changeouts

Equipment maintenance and repair

Finish machining

Parts assembly

Repetitive lifting jobs

Product packaging

Workshop and warehouse loading and unloading

SPECIFICATIONS	T5Hi-100	T5Hi-200	T5Hi-250	T5Hi-500
Voltage	220 V, 50 Hz	220 V, 50 Hz	220 V, 50 Hz	220 V, 50 Hz
Rated power	460W	450W	1350W	1350W
Rated current	3.5A	3.3A	9A	9A
Rated load	100kg	200kg	250kg	500kg
Lifting speed	0-16m/min	0-8m/min	0-22m/min	0-12m/min
Lifting height	5m	5m	5m	5m
Insulation grade	B	B	B	B
Chain diameter	4.0mm	4.0mm	6.3mm	6.3mm
Duty classes	M5	M5	M5	M5
Chain tensile strength	≥900 N/mm ²	≥900 N/mm ²	≥900 N/mm ²	≥900 N/mm ²
Protection class	Ip54	Ip54	Ip54	Ip54
Working duty	S3 50% - 10 min	S3 50% - 10 min	S3 50% - 10 min	S3 50% - 10 min
Operating temperature	0-40°C	0-40°C	0-40°C	0-40°C
Net weight	16.6kg	16.6kg	33.2kg	33.2kg

SPECIFICATIONS	QH-250	QH-500
Voltage	220 V, 50 Hz	220 V, 50 Hz
Rated power	1200W	1200W
Rated current	7.9A	7.9A
Rated load	250kg	500kg
Lifting speed	0-22m/min	0-12m/min
Lifting height	5m	5m
Insulation grade	B	B
Chain diameter	6.3mm	6.3mm
Duty classes	M5	M5
Chain tensile strength	≥900 N/mm ²	≥900 N/mm ²
Protection class	Ip54	Ip54
Working duty	S3 50% - 10 min	S3 50% - 10 min
Operating temperature	0-40°C	0-40°C
Speed ratio	27.9 : 1	46.3 : 1
Net weight	37kg	37kg




SYNERGY
AUTOMATIZACION



CONTACTENOS

Las oficinas centrales y las instalaciones de fabricación de las empresas Movomech están ubicadas en Kristianstad, en el sur de Suecia, con representación global a través de oficinas de ventas y distribuidores en todo el mundo. Desde Argentina y para toda Latinoamérica contactese con Synergy Automatización S.A.

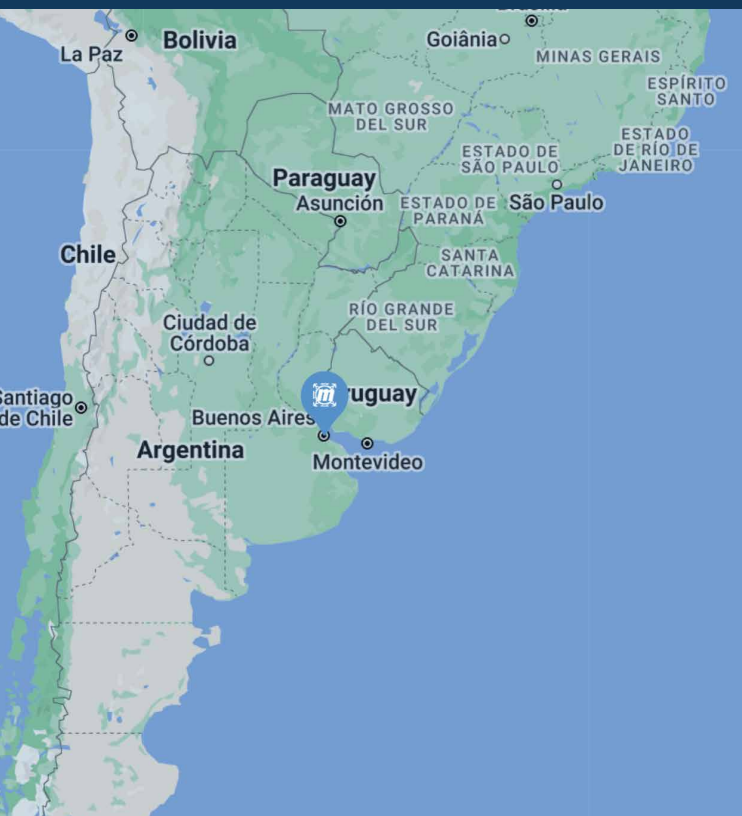

DIRECCIÓN DE VISITA

3 de Febrero 1029
Belén de Escobar (B1625)
Buenos Aires. Argentina.



DIRECCIÓN POSTAL

Sarandí 70.
CABA (C1081)
Buenos Aires. Argentina.



¿QUIERES HACER UN PEDIDO?

✉ pablo@synergy.com.ar
☎ +54 11 5263 8441
🕒 +549 11 6176 2243



INFORMACIÓN

¿Desea información sobre nuestros productos y soluciones?
✉ info@synergy.com.ar
☎ +54 11 5263 8441
🕒 +549 11 6176 2243

www.synergy.com.ar
Buenos Aires | Argentina